

# Telephone (touch screen)

## Correcting inputs

**Correction** to delete the last block of digits. After the command **Correction**, the system repeats the digits that were entered correctly up to that point.

## Deleting inputs

**Delete**, deletes all digits entered. It is then necessary to enter the digits again from the very beginning.

## Cancelling voice session

**Cancel** terminates voice session.

## Establishing a connection

The command **Dial** terminates input of the digits and a connection is established with the telephone number displayed.

**Note:** To make a foreign phone call say **Plus** followed by the country code.

## Redialling

The command **Phone redial** dials the telephone number last used.

Command	System response
<b>Phone redial</b>	>Phone redial, Confirm Yes or No<
<b>Yes</b>	>Dialling<


## STORING A TELEPHONE NAME/ NUMBER WITH VOICE RECOGNITION

Telephone numbers which you dial frequently can be stored in the Voice Recognition phone directory in conjunction with the contact name.

There are two methods of achieving this. The first is by entering the contact phone number via the touch screen. The second is initiated via a voice command.

### Storing via touch screen

From the touch screen, select the **Settings** menu icon, followed by **voice settings**, then select **voice add name**.

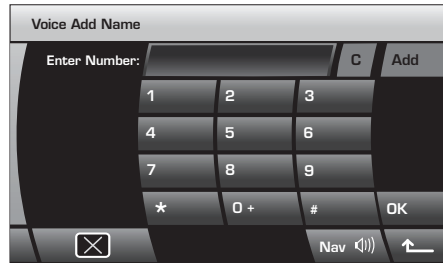

LAN2523

Enter the telephone number using the touch screen keypad. Select **Add** to initiate the voice recognition **Phone store name** function. Follow the process in the table below.

Command	System response
Press <b>Add</b> icon on <b>Voice Add Name</b> screen	<Name please>
(Follow voice prompts)	