CLOSING THE BONNET




Do not drive with the bonnet retained by the safety catch alone.

1. Lower the bonnet until the safety catch engages. Using both hands, press the bonnet down until the catches click.

ENGINE COMPARTMENT OVERVIEW

2. Check that both catches are engaged, by trying to lift the front edge of the bonnet.

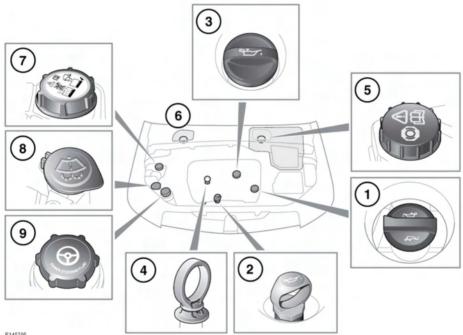

F145705

- 1. Engine oil filler cap (2.2L diesel).
- 2. Oil level dipstick (2.2L diesel).
- **3.** Engine oil filler cap (2.0L petrol).
- 4. Oil level dipstick (2.0L petrol).
- 5. Brake fluid reservoir cap (left-hand drive vehicles).
- 6. Brake fluid reservoir cap (right-hand drive vehicles).
- 7. Engine coolant filler cap.

- 8. Windscreen washer fluid filler cap.
- 9. Power steering fluid filler cap.
- \mathbb{A}

Do not drive if there is a possibility that leaked fluid will come into contact with a hot surface, such as the exhaust.