

Maintenance

Fuel system

WARNINGS



Under no circumstances should any part of the fuel system be dismantled or replaced by anyone other than a suitably qualified vehicle technician. Failure to comply with this instruction, may result in fuel spillage with a consequent serious risk of fire.



Keep sparks and naked lights away from the engine compartment.



Wear protective clothing, including, where practicable, gloves made from an impervious material.

Poisonous fluids

Fluids used in motor vehicles are poisonous and should not be consumed or brought into contact with open wounds. These include; battery acid, antifreeze, brake, clutch and power steering fluid, petrol, diesel, engine oil and windscreen washer additives.

For your own safety, always read and obey all instructions printed on fluid container labels.

Used engine oil

Prolonged contact with engine oil may cause serious skin disorders, including dermatitis and cancer of the skin. Always wash thoroughly after contact.



It is illegal to pollute drains, water courses or soil. Use authorised waste disposal sites to dispose of used oil and other chemicals.



OPENING AND CLOSING THE BONNET

WARNING



Do not drive with the bonnet retained by the safety catch alone.

Opening the bonnet

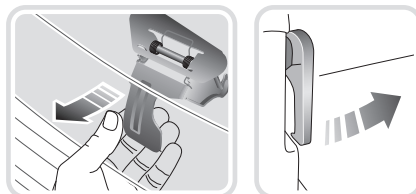

LAN2406

1. Pull the bonnet release handle located on the left-hand side of the vehicle.
2. Lift the bonnet safety catch lever and raise the bonnet.

Closing the bonnet

Lower the bonnet until the safety catch engages. Using both hands, press the bonnet down until the catches click.

Check that both catches are fully engaged by attempting to lift the front edge of the bonnet, which should be free from any movement.