

# Maintenance

## WASHER FLUID CHECK

### WARNINGS



Some screen wash products are inflammable, particularly if high or undiluted concentrations are exposed to sparking. Do not allow screen wash fluid to come into contact with naked flames or sources of ignition.



If the vehicle is operated in temperatures below 4°C (40°F), use a washer fluid with frost protection. In cold weather, failure to use a washer fluid with frost protection, could result in impaired vision and increase the risk of a vehicle crash.

### CAUTIONS




Do not use an antifreeze or vinegar/water solution in the washer reservoir - antifreeze will damage painted surfaces, while vinegar can damage the windscreen washer pump.



Body panels may suffer discolouration as a result of screen wash spillage. Take care to avoid spillage, particularly if an undiluted or high concentration is being used. If spillage occurs, wash the affected area immediately with water.

If the quantity of fluid remaining in the washer reservoir drops to less than one litre, the message **LOW WASHER FLUID** will be displayed in the message centre.

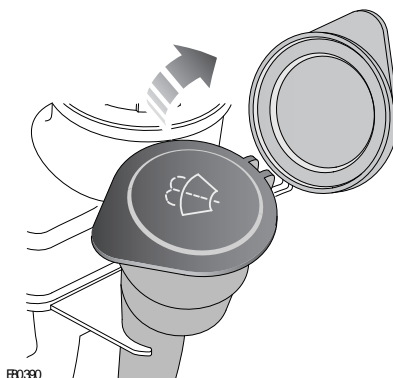

The washer reservoir supplies both front and rear screen washer jets and headlamp washer jets.

Check and top-up the reservoir level at least once per week. In cold climates, always top-up with screen washer fluid to prevent freezing. Operate the washers to check that the nozzles are clear and properly directed.