


## WHEEL CHANGING SAFETY

Before raising the vehicle or changing a wheel, ensure that you read and comply with the following warnings.

- ⚠ Always find a safe place to stop, off the highway and away from traffic.**
- ⚠ Ensure that the vehicle is on firm level ground.**
- ⚠ Apply the parking brake. Engage Park (P) on automatic vehicles, select 1st or reverse gear on manual vehicles.**
- ⚠ Switch on the hazard warning lamps.**
- ⚠ Ensure that the front wheels are in the straight ahead position and engage the steering lock.**
- ⚠ Disconnect trailer/caravan from vehicle.**
- ⚠ Ensure that all passengers, and animals, are out of the vehicle and in a safe place away from the highway.**
- ⚠ Place a warning triangle at a suitable distance behind the vehicle, facing towards oncoming traffic.**

## TOOL KIT

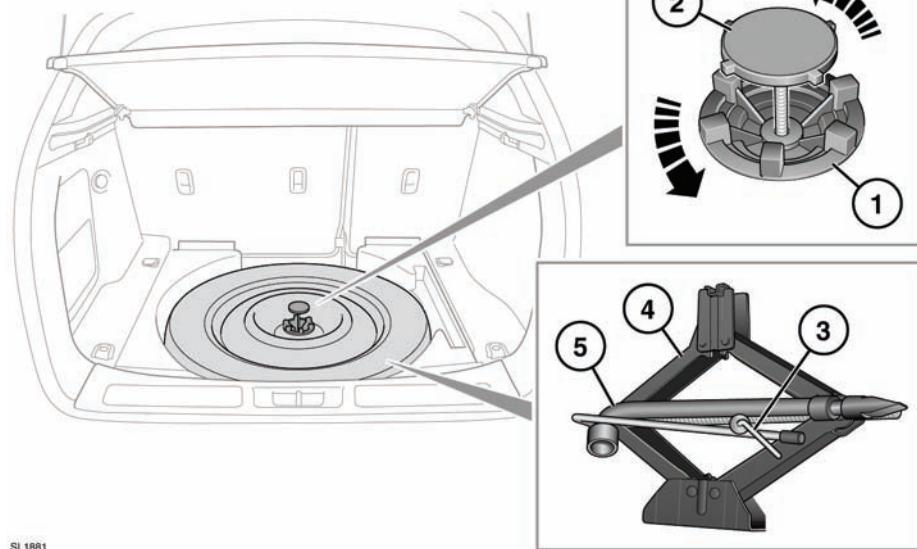

1. Temporary spare wheel locking ring.
2. Temporary spare wheel retaining bolt.
3. Tool kit retaining bolt.
4. Jack.

5. Wheel brace.

**⚠ After use, the tool kit should be returned to the storage area and correctly stowed.**