


## TOW BALL OPTIONS

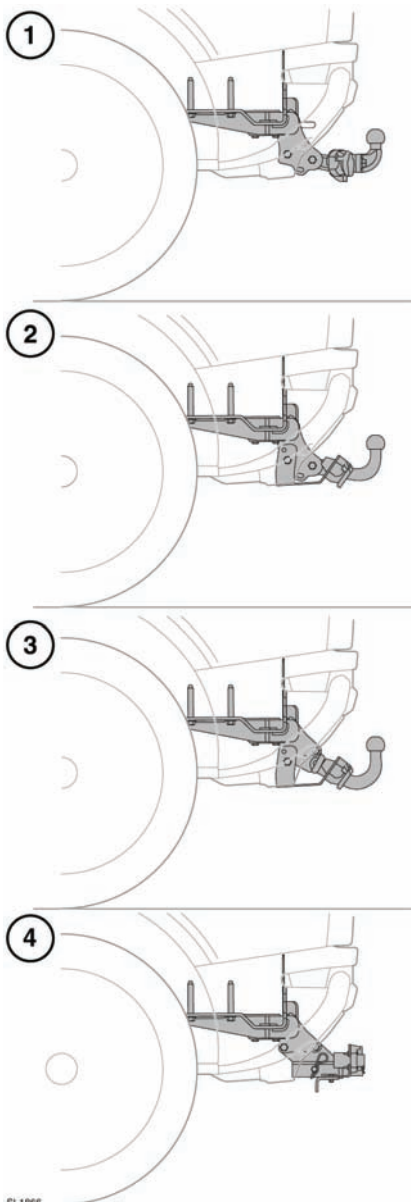


SL1866

1. Bolt on tow ball onto flange.
2. Fixed swan neck tow ball.
3. Detachable tow ball.
4. Receiver for hitch (drawbar). Australia only.

## TRAILER HITCH - Australia only

When selecting a drawbar for the receiver, the following dimensions must be adhered to:

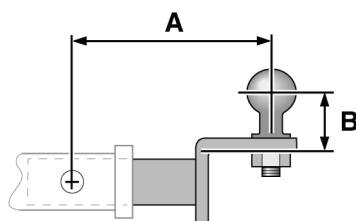

SL1970

- A. The maximum recommended drawbar length is 178mm (7 in).
- B. To achieve the maximum ball height, a drawbar with a rise of 68mm (2.7 in) is recommended.

Consult your Land Rover Dealer/Authorised Repairer for the latest information.