
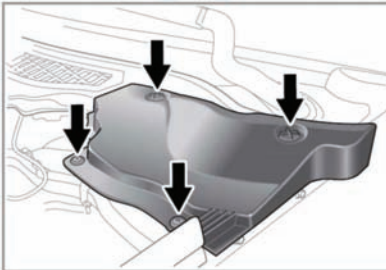



## UNDER BONNET COVERS - REMOVAL

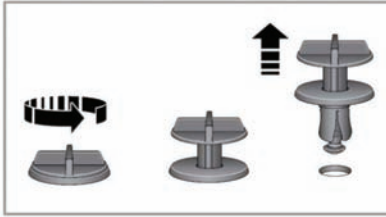

E159202

1. Release and remove the four turnbuckle clips securing the cover.
2. Lift the front edge of the cover and slide forwards to remove.

## UNDER BONNET COVERS - REFITTING

**!** Before refitting the underbonnet covers, ensure that no pipes, cables or other items, have been trapped between the cover and casing.

1. Place the cover over the casing, ensuring the four holes are aligned.

2. Push the cover down firmly and fasten the four turnbuckle clips.

## UNBLOCKING WASHER JETS

**!** Do not operate the washer jets during unblocking or adjustment. Windscreen washer fluid may cause irritation to the eyes and skin. Always read and observe the washer fluid manufacturer's instructions.

If a washer jet becomes blocked, use a thin strand of wire to unblock the jet by inserting the wire into the jet. Ensure that the wire is completely removed after unblocking. The washer jet position may also be adjusted by inserting the point of a needle into the jet and gently repositioning it.

## CHANGING A BULB

**!** All lamps are either LED or Xenon units and must only be replaced by a Land Rover Dealer/Authorised Repairer.

## WIPERS SERVICE POSITION

Before changing a front wiper blade, the wiper arms must be set in the 'service' position as follows;

**Note:** The Smart Key must remain in the vehicle while wiper blades are replaced.

1. Ensure that the ignition is turned off.
2. Turn the ignition on then off again.
3. Immediately push the wiper control down to start the single wipe operation and turn on the ignition again.

The wipers will move to their service position.

4. When the new parts have been fitted, turn the ignition off. This will return the wipers to park position.