
## **HEADLAMP BULB REPLACEMENT**


## **Combined Xenon and Halogen**

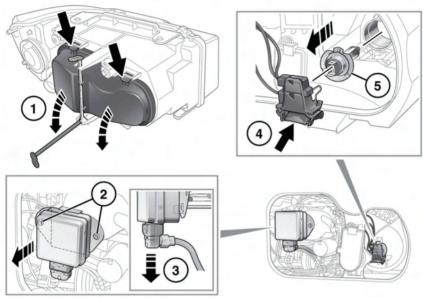

E136812

- 1. Unclip the locking lever, press down the two tabs and remove the cover.
- 2. Undo the two retaining screws and remove the Xenon unit.
- **3.** Remove the connector from the Xenon unit.
- 4. Pull the connector off of the Halogen bulb.
- **5.** Unclip the halogen bulb and remove it from the unit.

## **Halogen Only**

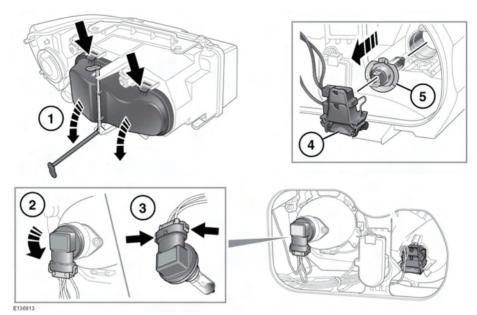

- 1. Unclip the locking lever, press down the two tabs and remove the cover.
- 2. Pull the Halogen dipped beam connector off of the bulb.
  - Take care not to touch this type of bulb with your fingers; always use a cloth to handle them. If necessary, clean the bulb with methylated spirits to remove fingerprints.
- 3. Unclip the bulb and remove it from the unit.
- **4.** Pull the main beam connector off of the bulb.
- 5. Unclip the bulb and remove it from the unit.