

Tires

* Retailer option wheel and tire for use with snow chains or traction devices.

** 245/45 R20 tires

If your vehicle is fitted with 245/45 R20 tires then the vehicle will be delivered with pressures as stated on the tire pressures label in order to optimize low speed ride comfort. For vehicle speeds in excess of 100mph (160km/h), pressures must be increased as indicated in the following table.

High speed pressure compensation

245/45 R20 Tires	Front tire pressure psi / kPa	Rear tire pressure psi / kPa
Speeds up to 100mph (160 km/h)	36 / 250	32 / 220
Speeds over 100mph (160 km/h)	39 / 270	35 / 240

If tire pressures are not increased as indicated in the table and vehicle speeds exceed 100mph (160km/h), the warning message '**Tire pressures low for high speed**' may be displayed in the message center. If this message is displayed, reduce speed to below 100 mph (160 km/h). If required, adjust tire pressures as indicated at the earliest opportunity.

TIRE VALVES

Keep the valve caps screwed down firmly to prevent water or dirt entering the valve. Check the valves for leaks when checking the tire pressures.

PUNCTURED TIRES


⚠ WARNING

Do not drive the vehicle with a punctured tire. Even if the punctured tire has not deflated, it is unsafe to use, as the tire may deflate suddenly at any time.

REPLACEMENT TIRES

NOTICE

If treadwear is uneven across the tire, or a tire wears excessively, the vehicle should be checked by your Land Rover Retailer as soon as possible.

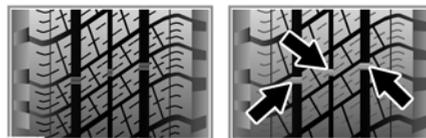

SL1224