


## TOW HITCH

### **⚠ WARNING**

**When handling the tow hitch, hold the bottom of the component. Locking into position occurs automatically and causes the locking lever to rotate under spring pressure.**

The tow hitch is stowed in the loadspace tool kit, see **206, TOOL KIT**.

The optional trailer hitch is rated as a Class IV. When selecting a drawbar for the receiver, the following dimensions must be adhered to:

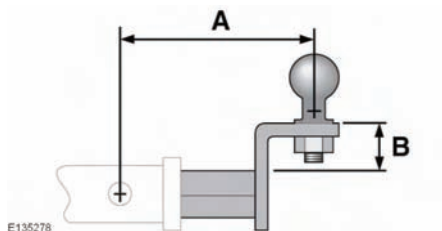

**A.** Drawbar length = 9 inches (228 mm).

**B.** Drawbar rise = 1.5 inches (38 mm).

Consult a Land Rover Retailer/Authorized Repairer for the latest information.