


DIMENSIONS

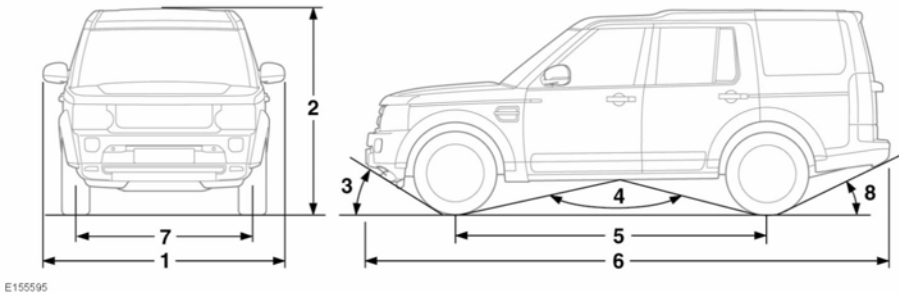

Item	Description	Inches (mm)	Degrees
1	Width (including mirrors)	85.7 (2176)	-
2	Overall heights:		
	Suspension set at Standard ride height *	76.3 (1938)	-
	Suspension set at Access height *	74.3 (1888)	-
	Suspension set at Off-road height *	78.5 (1993)	-
3	Approach angle (at curb weight and Off-road height)	-	36.2°
4	Ramp breakover angle (at curb weight and Off-road height)	-	125.4°
5	Wheelbase	113.6 (2885)	-
6	Overall length	190.5 (4838)	-
7	Track - front	63.2 (1605)	-
	Track - rear	63.5 (1612.5)	-
8	Departure angle without tow hitch (at curb weight plus full size spare tire and at Off-road height)	-	28.1°
	Departure angle with fixed height tow hitch (at curb weight) -at Standard ride height	-	15.7°
	Departure angle with fixed height tow hitch (at curb weight) at Off-road height	-	18.5°
-	Turning circle (curb to curb)	37.5 ft (11.45 m)	-
-	Maximum wading depth at Standard height	23.6 (600)	-
	Maximum wading depth at Off-road height	28 (700)	-

Technical specifications

Item	Description	Inches (mm)	Degrees
-	Minimum ground clearance at Standard height	7.3 (185)	-
	Minimum ground clearance at Off-road height	9.4 (240)	-
-	Maximum gradient, nose up/down, continuous operation	-	35°
-	Maximum gradient, nose up/down, drive through	-	45°

Note: * All the overall heights (2), include the external roof mounted aerial.