


## REMOTE KEY FOB TRANSMITTER LOCATIONS

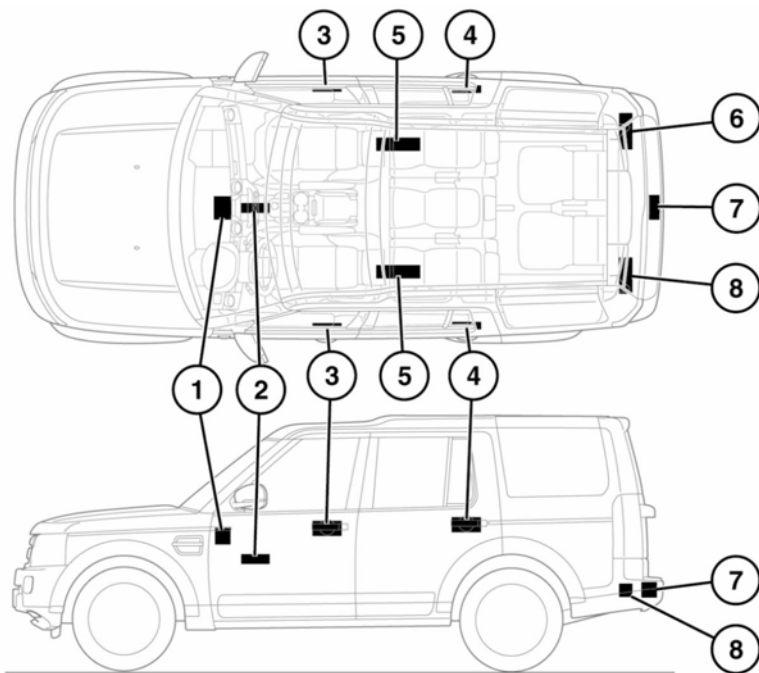

E 155596

1. Cabin front transmitter.
2. Keyless start module.
3. Front exterior door handle transmitters.
4. Rear exterior door handle transmitters.
5. Cabin headlining transmitter.
6. Right side loadspace transmitter.
7. Loadspace.
8. Left side loadspace transmitter.

### **⚠ WARNING**

**Any person fitted with an implanted medical device should be kept at a distance of at least 8.7 inches (22 cm) away from any transmitter mounted in the vehicle. This is to avoid any possibility of interference between the system and the device.**

The key system transmitter radio frequency approval numbers for the USA and Canada are as follows:

USA FCC ID:	KOBJTF10A
	KOBJLR09A
	KOJBGB10A
	KOJBGB10B

Canada IC:	3521A-JTF10A
	3521-JLR09A
	3521-JBG10A
	3521-JBG10B
Model Number:	AH22-15K601A
	AH42-15K602-A
	AH22-19H440 (PEPS)
	AH42-19H440 (Passive Start only)

- (1) this device may not cause interference, and  
 (2) this device must accept any interference, including interference that may cause undesired operation of the device.

**Note:** *The manufacturer is not responsible for any radio interference caused by unauthorized modifications to this equipment. Changes or modifications not expressly approved by the party responsible for compliance, could void the user's authority to operate the equipment.*

## NOTICE

*The Smart key may suffer interference from other legal users of the this radio frequency band, such as radio amateurs, medical equipment, remote controls, or alarm systems. To lock or unlock the vehicle in such a situation, either use a key or operate the key transmitter as close to the security antenna as possible.*

## USA

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and  
 (2) this device must accept any interference received, including interference that may cause undesired operation.

## Canada

IC - RSS-210

Operation is subject to the following two conditions: