

When Reverse (**R**) gear is selected, both front and rear sensors will be active. When Drive (**D**) is selected, only the front sensors will be active.

Note: If the system does not detect an object likely to come into contact with the vehicle, it will not display any tracking information in the Touch screen.

When objects are detected, the Parking aid systems emit a warning tone which increases in frequency as the vehicle gets closer to an object. The tone becomes constant when the obstacle is within 12 inches (300 mm).

The Parking aid system operates up to a speed of 10 mph (16 km/h).

CLEANING THE SENSORS

NOTICE

When washing the vehicle, do not aim high pressure water jets directly at the sensors. Do not use abrasive materials or hard/sharp objects to clean the sensors. Only use approved vehicle shampoo.

The sensors should be kept clean to maintain accuracy and performance.

PARKING AID SYSTEM FAULT

If a system fault is detected, a long high-pitched tone will sound and the switch indicator will flash. Also a graphic and the message **Parking Aid is not available. Please consult your dealer** will be displayed on the Touch screen. Contact a Retailer/Authorized Repairer as soon as possible.


REAR VIEW CAMERA

⚠ WARNING

It remains the driver's responsibility to detect obstacles and estimate the vehicle's distance from them when reversing.

NOTICE

Some overhanging objects or barriers which could cause damage to the vehicle, may not be detected by the camera.

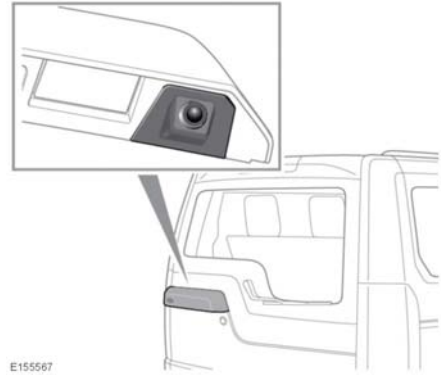

When Reverse (**R**) is selected, the screen automatically displays a wide-angle, color image from the rear of your vehicle.

The rear-view camera system provides a rear-view image to assist in reversing the vehicle. Overlaid on the image are reversing guidelines.

Note: The rear-view images and menu options are dependent upon the specification of the rear-view camera fitted to the vehicle.



Note: A camera icon will be displayed on the user options screen, when selected from **Extra features**. Touch the camera icon, to return to the rear-view camera screen

Note: The rear camera display has priority over the Parking aids display. To cancel the camera display at any time, push the **Home menu** hard button or touch the back soft key.

Rear-view camera display on the Touch screen will discontinue when either of the following apply:

Parking aids

- Drive (**D**) is selected for longer than 5 seconds.
 - Drive (**D**) is selected and/or the vehicle's speed is greater than 11 mph (18 km/h).
7. Touch to enable/disable Hitch assist guidance lines. (**5**) and (**6**) will be disabled when the Hitch assist guidance is active.

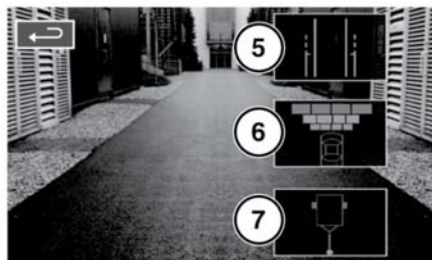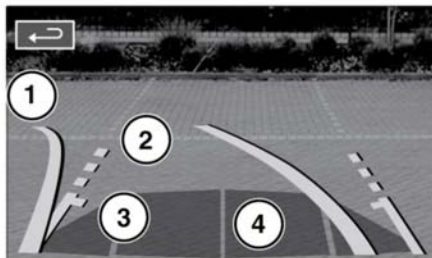

E153094

1. Solid line: The projected path based on the current steering wheel position.
2. Dotted line: The safe working width of the vehicle (including exterior mirrors).
3. Tailgate access guideline: Do not reverse beyond this point if tailgate access is required.
4. Parking sensor activation: A colored area appears, to indicate which rear sensor(s) has been activated.
5. Touch to enable/disable (**1**), (**2**) and (**3**).
6. Touch to enable/disable (**4**), the Parking sensor.