


## Parking aids

When objects are detected, the parking aid emits a warning tone which increases in frequency as the vehicle gets closer to the object and then becomes constant when the obstacle is within 300 mm (12 inches).

**Note:** The front parking aid provides an audible proximity warning when driving forwards and when reversing.

### CLEANING THE SENSORS

 When washing the vehicle, do not aim high pressure water jets directly at the sensors. Do not use abrasive materials or hard/sharp objects to clean the sensors. Only use approved vehicle shampoo.

The sensors should be kept clean to maintain accuracy and performance.


### PARKING AID SYSTEM FAULT

If a system fault is detected, a long high-pitched tone will sound, and the switch indicator will flash. Contact your Dealer/Authorised Repairer as soon as possible.

### REAR CAMERA



**It remains the driver's responsibility to detect obstacles and estimate the vehicle's distance from them when reversing.**

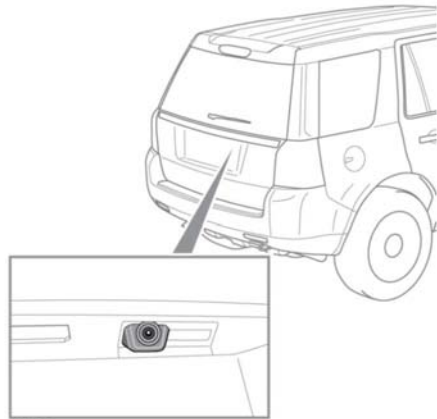

E153076


When Reverse (**R**) gear is selected, the screen automatically displays a wide angle, colour image from the rear of your vehicle.

The rear-view camera system provides a rear-view image to assist in reversing the vehicle. Overlaid on the image are reversing guidelines.


Rear-view camera display on the Touch screen will discontinue when either of the following apply:

- Drive (**D**) is selected for longer than 5 seconds.
- Drive (**D**) is selected and/or vehicle speed is greater than 18 km/h (11 mph).

To adjust the camera settings while in Reverse (**R**), touch anywhere on the Touch screen to display the user options.

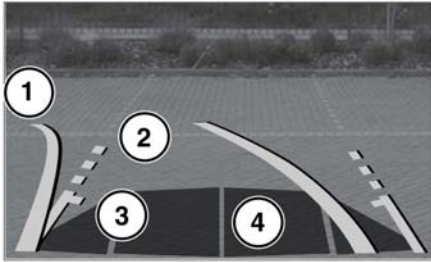

**!** The camera must be kept clean and free from debris or obstructions, for example, ice, frost, snow, leaves, mud or insects. Failure to keep the camera clean may result in miscalculation or false indications.

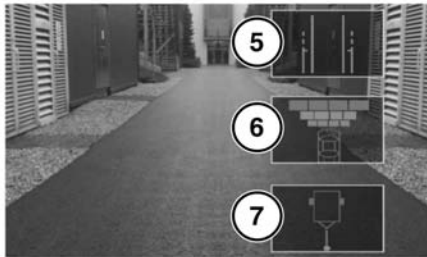

E145190

1. Solid line: The projected path based on the current steering wheel position.
2. Dotted line: The safe working width of the vehicle (including exterior mirrors).
3. Taildoor access guideline: Do not reverse beyond this point, if taildoor access is required.
4. Parking sensor activation: A coloured area appears, to indicate which rear sensor(s) has been activated.
5. User option: Touch to enable/disable (1), (2) and (3).
6. User option: Touch to enable/disable (4) Parking sensor.
7. User option: Touch to enable/disable Hitch Assist guidance lines.