
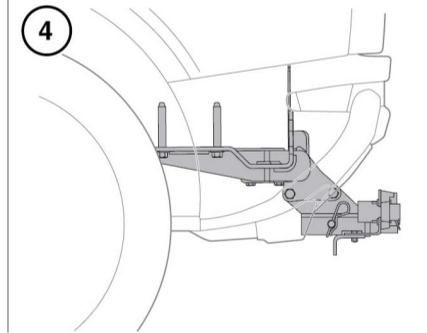
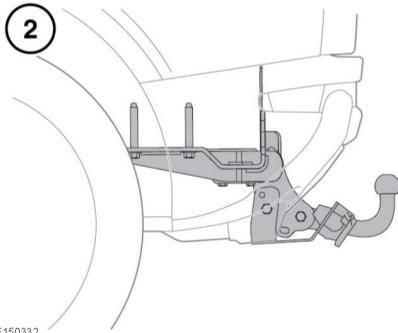
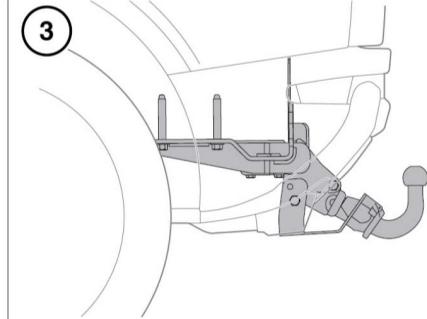


## TOW BALL OPTIONS

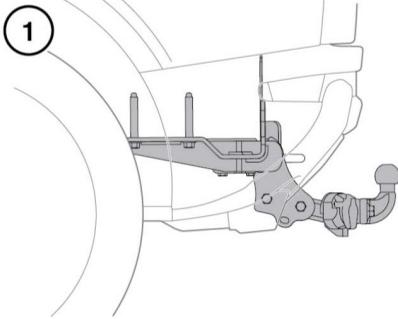


E150332

1. Bolt on tow ball onto flange.
2. Fixed swan neck tow ball.
3. Detachable tow ball.
4. Receiver for hitch (drawbar). Australia only.

## TRAILER HITCH

When selecting a drawbar for the receiver, the following dimensions must be adhered to:



E155916

1. The maximum recommended drawbar length is 178 mm (7 in).

2. To achieve the maximum ball height, a drawbar with a rise of 68 mm (2.7 in) is recommended.

Consult a Dealer/Authorised Repairer for the latest information.