


## DIMENSIONS

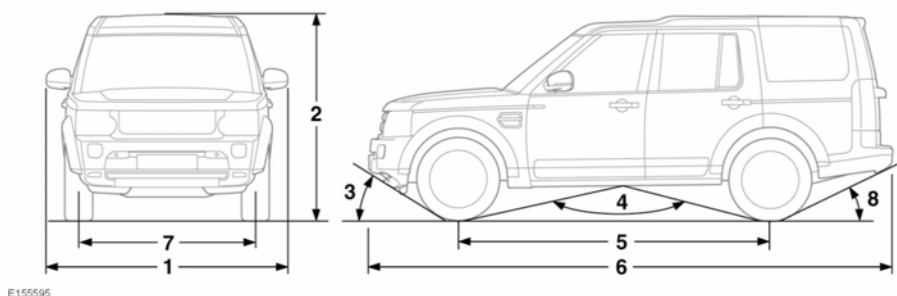

| Item | Description  | mm (inches)    | Degrees |
|------|--|----------------|---------|
| 1    | Width (including mirrors)  | 2 200 (86.6)   | -       |
| 2    | Overall heights:   |                |         |
|      | Vehicles with Coil spring suspension *   | 1 912 (75.3)   | -       |
|      | Suspension set at Standard ride height *   | 1 938 (76.3)   | -       |
|      | Suspension set at Access height *  | 1 888 (74.3)   | -       |
|      | Suspension set at Off-road height *  | 1 993 (78.5)   | -       |
| 3    | Approach angle (at kerb weight - Standard ride height, and vehicles with Coil spring suspension)       | -              | 32.2°   |
|      | Approach angle (at kerb weight - Off-road height)  | -              | 36.2°   |
| 4    | Ramp breakover angle (at kerb weight - Standard ride height, and vehicles with Coil spring suspension) | -              | 134.4°  |
|      | Ramp breakover angle (at kerb weight - Off-road height)  | -              | 125.4°  |
| 5    | Wheelbase  | 2 885 (113.6)  | -       |
| 6    | Overall length   | 4 838 (190.5)  | -       |
| 7    | Track - front  | 1 605 (63.2)   | -       |
|      | Track - rear   | 1 612.5 (63.5) | -       |

| Item | Description   | mm (inches)           | Degrees |
|------|---|-----------------------|---------|
| 8    | Departure angle without tow hitch (at kerb weight plus full size spare tyre - Standard ride height, and vehicles with Coil spring suspension) | -                     | 24.9°   |
|      | Departure angle without tow hitch (at kerb weight plus full size spare tyre - Off-road height)  | -                     | 28.1°   |
|      | Departure angle with fixed height tow hitch (at kerb weight) - Standard ride height, and vehicles with Coil spring suspension)                | -                     | 15.7°   |
|      | Departure angle with fixed height tow hitch (at kerb weight) - Off-road height  | -                     | 18.5°   |
| -    | Maximum wading depth - vehicles with Coil spring suspension)  | 600 (23.62)           | -       |
|      | Maximum wading depth - Off-road height  | 700 (27.56)           | -       |
| -    | Minimum ground clearance - Standard ride height, and vehicles with Coil spring suspension)  | 185 (7.3)             | -       |
|      | Minimum ground clearance - Off-road height  | 240 (9.4)             | -       |
| -    | Turning circle (kerb to kerb)   | 11.45 m<br>(37.57 ft) | -       |
| -    | Maximum gradient (nose up/down - continuous operation)  | -                     | 35°     |
| -    | Maximum gradient (nose up - drive through)  | -                     | 45°     |
| -    | Maximum gradient (nose down - drive through)  | -                     | 40°     |

**Note:** \* All the overall heights (2), include the external roof mounted aerial.