
## TOW BALL AND MOUNTING POINT DIMENSIONS (Multi-height drop plate)

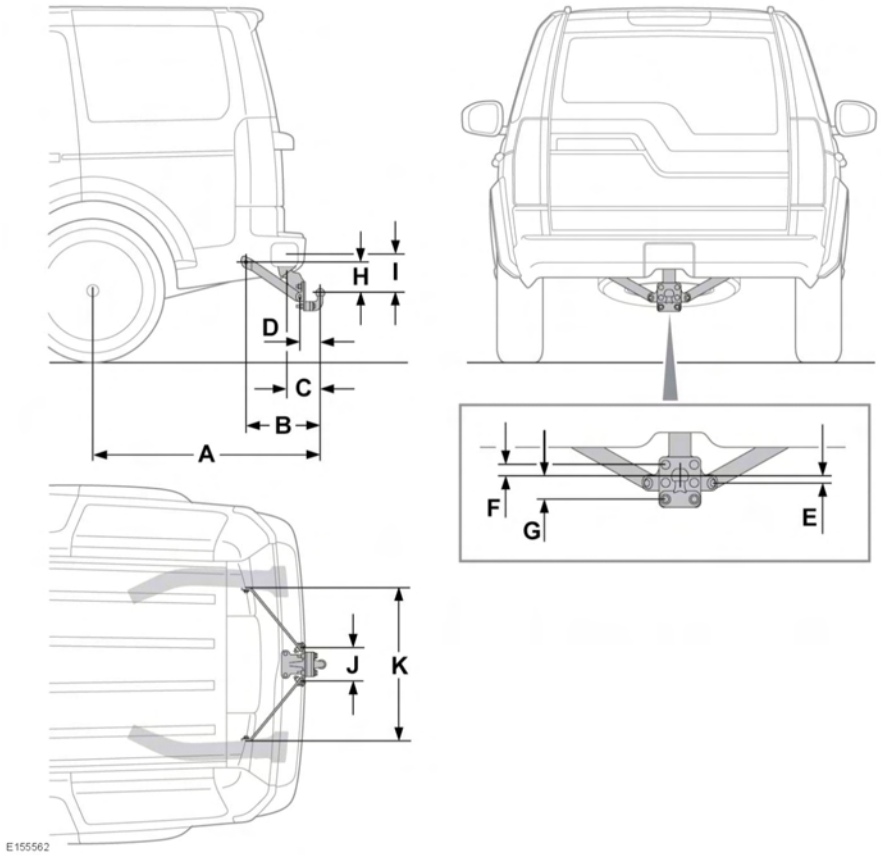


| Ref. | Dimension | Metric | Imperial |
|---|---|---|---|
| A | Wheel centre to centre of tow ball | 1,210 mm | 47.64 in. |
| B | Centre of outer attachment points to centre of tow ball (horizontal) | 403.6 mm | 15.89 in. |
| C | Centre of housing bayonet slot tip radius to centre of tow ball | 192.4 mm | 7.57 in. |
| D | Centre of inner attachment points to centre of tow ball (horizontal) | 124 mm | 4.9 in. |

| Ref. | Dimension | Metric | Imperial |
|---|---|---|---|
| E | Centre of inner attachment points to centre of tow ball (vertical) | 20 mm | 0.79 in. |
| F | Centre of upper tow ball plate bolt to centre of tow ball (vertical) | 36 mm | 1.42 in. |
| G | Centre of lower tow ball plate bolt to centre of tow ball (vertical) | 70 mm | 2.76 in. |
| H | Centre of outer attachment points to centre of tow ball (horizontal) | 167.3 mm | 6.59 in. |
| I | Centre of line housing bayonet slot tip radius to centre of tow ball (vertical) | 174.3 mm | 6.86 in. |
| J | Distance between inner attachment point centres | 180.5 mm | 7.10 in. |
| K | Distance between outer attachment point centres | 822.5 mm | 32.38 in. |