


DIMENSIONS

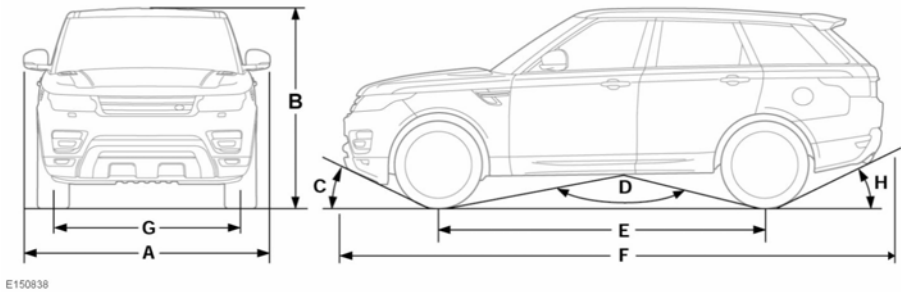

E150838

Item	Description	mm (inches)	Degrees
A	Width (including mirrors)	2 220 (87.4)	-
B	Height (Standard road height)	1 780 (70.1)	-
	Height (with roof antenna module)	1 801 (70.9)	-
	Height (maximum with sunroof open)	1 817 (71.5)	-
C	Approach angle ¹ - All vehicles except SVR	-	24.3°
	Approach angle ¹ - SVR	-	22.4°
D	Ramp breakover angle (All petrol and V6 diesel vehicles) ¹	-	141.2°
	Ramp breakover angle (Hybrid vehicles) ¹	-	142.2°
	Ramp breakover angle (V8 diesel vehicles) ¹	-	140.4°
E	Wheelbase	2 923 (115.1)	-
F	Overall length - All vehicles except SVR	4 850 (191)	-
	Overall length - SVR	4 872 (191.8)	-
G	Track - front	1 690 (66.5)	-
	Track - rear	1 685 (66.3)	-
H	Departure angle without tow hitch ² - All vehicles except SVR	-	24.9°
	Departure angle without tow hitch ² - SVR	-	22.5°
H	Departure angle with adjustable height tow hitch ¹	-	14.7°
H	Departure angle with electrically deployable tow hitch (stored)	-	24.9°

Technical specifications

Item	Description	mm (inches)	Degrees
H	Departure angle with electrically deployable tow hitch (deployed)	-	16.1°
-	Wading depth (Off-road height)	850 (33.5)	-
-	Minimum ground clearance ³	213 (8.4)	-
-	Turning circle (wall to wall)	12 500 (492)	-

¹ At EEC kerb weight and Standard road height.

² At EEC kerb weight plus full size spare tyre and at Standard road height.

³ With Standard road height selected. When driving off-road, vehicle's fitted with deployable side steps, fixed side steps or side tubes, have a different ground and side clearance.