


## DIMENSIONS

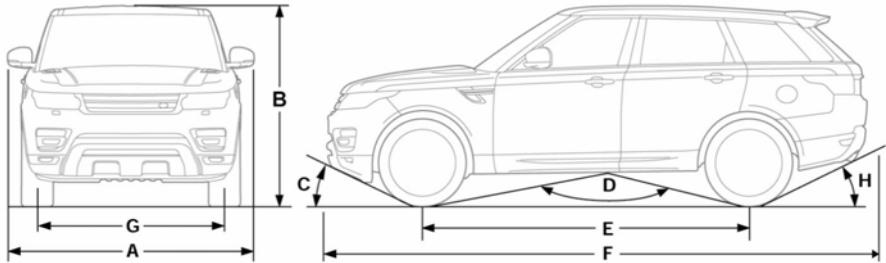

E150838

Item	Description	mm (inches)	Degrees
<b>A</b>	Width (including mirrors)	2 220 (87.4)	-
<b>B</b>	Height (Standard road height)	1 780 (70.1)	-
	Height (with roof antenna module)	1 801 (70.9)	-
	Height (maximum with sunroof open)	1 817 (71.5)	-
<b>C</b>	Approach angle <sup>1</sup> - All vehicles except SVR	-	24.3°
	Approach angle <sup>1</sup> - SVR	-	22.4°
<b>D</b>	Ramp breakover angle (All petrol and V6 diesel vehicles) <sup>1</sup>	-	141.2°
	Ramp breakover angle (Hybrid vehicles) <sup>1</sup>	-	142.2°
	Ramp breakover angle (V8 diesel vehicles) <sup>1</sup>	-	140.4°
<b>E</b>	Wheelbase	2 923 (115.1)	-
<b>F</b>	Overall length - All vehicles except SVR	4 850 (191)	-
	Overall length - SVR	4 872 (191.8)	-
<b>G</b>	Track - front	1 690 (66.5)	-
	Track - rear	1 685 (66.3)	-
<b>H</b>	Departure angle without tow hitch <sup>2</sup> - All vehicles except SVR	-	24.9°
	Departure angle without tow hitch <sup>2</sup> - SVR	-	22.5°
<b>H</b>	Departure angle with adjustable height tow hitch <sup>1</sup>	-	14.7°
<b>H</b>	Departure angle with electrically deployable tow hitch (stored)	-	24.9°

## Technical specifications

Item	Description	mm (inches)	Degrees
H	Departure angle with electrically deployable tow hitch (deployed)	-	16.1°
-	Wading depth (Off-road height)	850 (33.5)	-
-	Minimum ground clearance <sup>3</sup>	213 (8.4)	-
-	Turning circle (wall to wall)	12 500 (492)	-
<sup>1</sup> At EEC kerb weight and Standard road height.			
<sup>2</sup> At EEC kerb weight plus full size spare tyre and at Standard road height.			
<sup>3</sup> With Standard road height selected. When driving off-road, vehicle's fitted with deployable side steps, fixed side steps or side tubes, have a different ground and side clearance.			