


DIMENSIONS

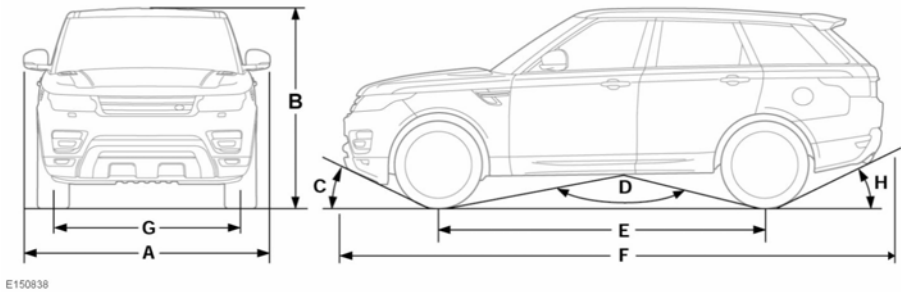

| Item | Description | mm (inches) | Degrees |
|----------|--|---------------|---------|
| A | Width (including mirrors) | 2 220 (87.4) | - |
| B | Height (Standard road height) | 1 780 (70.1) | - |
| | Height (with roof antenna module) | 1 801 (70.9) | - |
| | Height (maximum with sunroof open) | 1 817 (71.5) | - |
| C | Approach angle ¹ - All vehicles except SVR | - | 24.3° |
| | Approach angle ¹ - SVR | - | 22.4° |
| D | Ramp breakover angle (All petrol and V6 diesel vehicles) ¹ | - | 141.2° |
| | Ramp breakover angle (Hybrid vehicles) ¹ | - | 142.2° |
| | Ramp breakover angle (V8 diesel vehicles) ¹ | - | 140.4° |
| E | Wheelbase | 2 923 (115.1) | - |
| F | Overall length - All vehicles except SVR | 4 850 (191) | - |
| | Overall length - SVR | 4 872 (191.8) | - |
| G | Track - front | 1 690 (66.5) | - |
| | Track - rear | 1 685 (66.3) | - |
| H | Departure angle without tow hitch ² - All vehicles except SVR | - | 24.9° |
| | Departure angle without tow hitch ² - SVR | - | 22.5° |
| H | Departure angle with adjustable height tow hitch ¹ | - | 14.7° |
| H | Departure angle with electrically deployable tow hitch (stored) | - | 24.9° |

Technical specifications

| Item | Description | mm (inches) | Degrees |
|----------|---|--------------|---------|
| H | Departure angle with electrically deployable tow hitch (deployed) | - | 16.1° |
| - | Wading depth (Off-road height) | 850 (33.5) | - |
| - | Minimum ground clearance ³ | 213 (8.4) | - |
| - | Turning circle (wall to wall) | 12 500 (492) | - |

¹ At EEC kerb weight and Standard road height.

² At EEC kerb weight plus full size spare tyre and at Standard road height.

³ With Standard road height selected. When driving off-road, vehicle's fitted with deployable side steps, fixed side steps or side tubes, have a different ground and side clearance.