




Park assist must not be used if any of the following conditions exist:

- A temporary spare wheel is in use.
- A sensor is damaged or the bumper is damaged sufficiently enough to affect a sensor mounting point.
- A sensor is obstructed by items attached to the vehicle, for example, bumper covers, a bicycle rack, a trailer or stickers.
- The vehicle is being used to transport a load that extends beyond the vehicle's perimeter.

**Note:** All of the doors and the tailgate must be securely closed when using Park assist.

**Note:** During any Park assist manoeuvre, the Parking aid system will remain active and will sound when objects are detected near to the vehicle.

## SELECTING PARK ASSIST

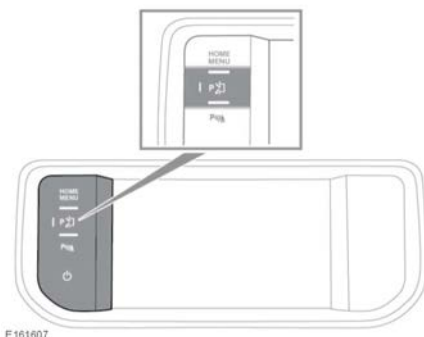

A short press of the Park assist button will turn the system on. When Park assist is switched on, the button LED will illuminate.

The Park assist button can be used to scroll through the three Park assist features:

- A first press of the button turns the system on and selects Parallel parking.

- A second press of the button selects Perpendicular parking.
- A third press of the button selects Parking exit.
- A fourth press of the button turns the system off and will extinguish the LED.

The selected feature's name is displayed in the Instrument panel's Message centre. Follow the instructions and alerts shown in the Message centre, to complete the required manoeuvre.

## USING PARK ASSIST

When Parallel or Perpendicular parking is selected, the size of any potential parking space is assessed, as the vehicle is driven forward.

**Note:** For Park assist to search effectively, maintain a distance of 0.5 metres to 1.5 metres (1.6 feet to 4.9 feet) between the vehicle and the row of parked vehicles/objects between which you wish to park.

**Note:** When first activated, Park assist searches for a space on the passenger side of the vehicle. To search for a space on the driver's side, signal a turn in that direction.

**Note:** The Park assist auto searching feature becomes active when the vehicle's speed is less than 30 km/h (19 mph). When Park assist is activated, a previously passed space may have been located. To locate a previously passed space on the other side of the vehicle, signal a turn in that direction.

When a suitable space is found, a short confirmation tone is given and a message displays in the Message centre.

**Note:** If Park assist senses that other vehicles are too close either side to perform a parking manoeuvre, a space will be rejected, even if it is large enough for the vehicle. The driver retains the option to switch Park assist off and attempt the manoeuvre manually.