


## DIMENSIONS

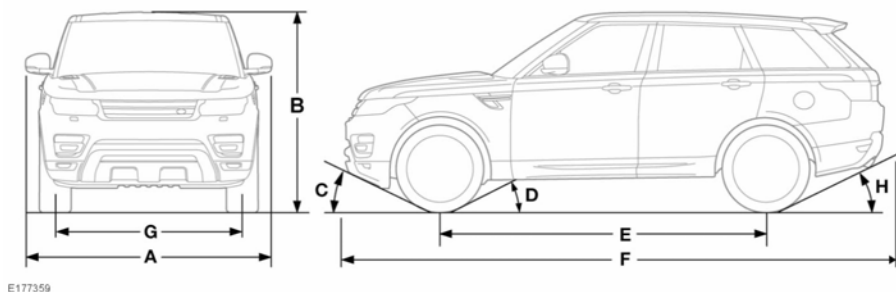

E177359

Item	Description	Variant	mm	Degrees
<b>A</b>	Width (including mirrors)	All vehicles	2 220	-
<b>B</b>	Height <sup>1</sup>	All vehicles	1 780	-
	Height <sup>1</sup> (with roof antenna module)	All vehicles	1 801	-
	Height <sup>1</sup> (maximum with sunroof open)	All vehicles	1 817	-
<b>C</b>	Approach angle* - standard height	All vehicles - except SVR	-	24.3°
		SVR vehicles	-	22.4°
	Approach angle* - off road height	All vehicles	-	33.0°
<b>D</b>	Ramp breakover angle* - standard height	All Petrol and V6 Diesel vehicles	-	19.4°
		Hybrid vehicles	-	18.9°
		V8 Diesel	-	19.8°
	Ramp breakover angle* - off road height	V6 Diesel vehicles	-	27.2°
		All Petrol vehicles	-	27.0°
		Hybrid vehicles	-	25.9°
		V8 Diesel	-	27.3°
<b>E</b>	Wheelbase	All vehicles	2 923	-

## Technical specifications

Item	Description	Variant	mm	Degrees
<b>F</b>	Overall length	All vehicles - except SVR	4 850	-
		SVR vehicles	4 872	-
<b>G</b>	Track - front	All vehicles	1 690	-
	Track - rear	All vehicles	1 685	-
<b>H</b>	Departure angle* - standard height	All vehicles with a spare wheel - except SVR	-	24.9°
		SVR vehicles with a spare wheel	-	22.5°
		Vehicles with a stowed powered tow ball	-	24.9°
		Vehicles with a deployed powered tow ball	-	16.1°
		Vehicles with a multi height tow bar	-	14.7°
	Departure angle* - off road height	All vehicles with a spare wheel - except SVR	-	31.0°
		SVR vehicles with a spare wheel	-	27.3°
		Vehicles with a stowed powered tow ball	-	31.0°
		Vehicles with a deployed powered tow ball	-	20.6°
		Vehicles with a multi height tow bar	-	19.4°
-	Wading depth (off road height)	All vehicles	850	-

Item	Description	Variant	mm	Degrees
-	Minimum ground clearance <sup>2</sup> - standard height	All vehicles	213	-
	Minimum ground clearance <sup>2</sup> - off road height	All vehicles	278	-
-	Turning circle (wall to wall)	All vehicles	12.5 metres	-

\* At EEC kerb weight.

<sup>1</sup> At EEC kerb weight and at standard road height.

<sup>2</sup> At EEC kerb weight, with a full size spare tyre and at standard road height.

<sup>3</sup> Vehicle's with deployable side steps, fixed side steps or side tubes, have a different ground and side clearance.