


### FOLDING AND RAISING THE SPLIT FOLD SEATS

The split fold seats can be folded forward completely to accommodate large loads, or folded partially to accommodate long loads and still retain seating for passengers.

The side fold seats can be folded individually, as required, to increase load space.

 **Always make sure that objects carried within the vehicle are secured properly.**



**Make sure that if the rear head restraints are removed they are stored securely.**




**All vehicle occupants should be seated correctly, and wear a seat belt at all times, when the vehicle is in motion.**



**Make sure the head restraint is refitted and adjusted, once the child seat is removed or the seat is restored to the seating position.**



To prevent rubbing damage to the folded seats, it may be necessary to move the front seats forward and adjust the seatbacks to a more upright position.

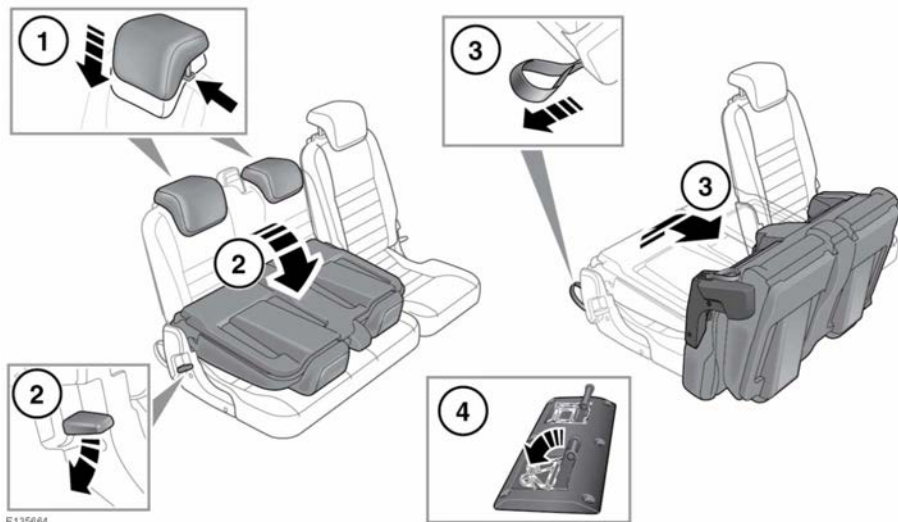

To fold the split fold seats:

1. Fully lower the head restraints.
2. Push the locking lever down to release a seatback and then fold the seat forwards.
3. Pull the strap towards the front of the vehicle and pivot the seat to the stowed position.

4. To create a flat loading area when the whole of the seat is folded forward, also fold the latch mechanisms into the floor.

The process for erecting the split fold seats is the reverse of folding. Make sure that the vehicle is on level ground before erecting the seats.



**Make sure that when the seatback is raised the locking lever is fully raised.**