

## After a collision

### BEFORE STARTING OR DRIVING



If the vehicle is involved in a collision it should be checked by a Dealer/ Authorised Repairer, or suitably qualified persons, before starting or driving.

### AFTER DEPLOYMENT OF THE PEDESTRIAN PROTECTION SYSTEM

**Note:** Fitment of the Pedestrian protection system is market and model dependent.


Following a collision, the vehicle must be stopped as soon as it is safe to do so.

The hazard warning lamps will be activated and can only be switched off by pressing the engine Start/stop button to turn the engine off and on again.

A warning message will appear in the Message centre and, if requested, the vehicle should be transported to the nearest Dealer/Authorised Repairer.

If the Pedestrian airbag deploys following a collision and none of the internal airbags have deployed, the vehicle can be driven after the Pedestrian airbag has been stowed. See **244, REPACKING THE PEDESTRIAN AIRBAG.**

### REPACKING THE PEDESTRIAN AIRBAG

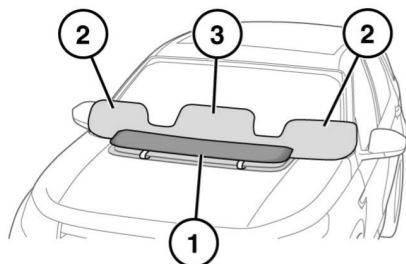


E166795

1. Airbag cover.

2. Airbag side panels inflated.
3. Airbag centre panel inflated.

Repack the Pedestrian airbag, as follows:

**Note:** If the airbag is not fully deflated, fold and compress the airbag to release air, before starting to repack.

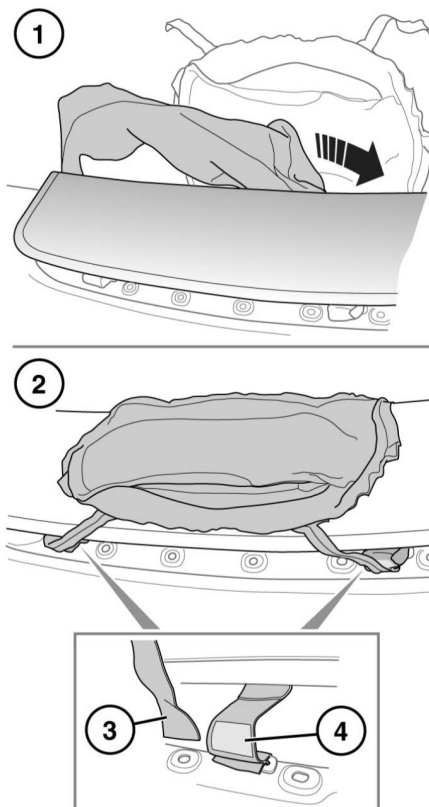

E166796

1. Fold both of the airbag side panels across the vehicle, and underneath the airbag cover.
2. Pull the airbag centre panel over the airbag cover.